


DA-4120/DA-4240/DA-4350/DA-4500


4 Channel 120W/240W/350W/500W Digital Power Amplifier

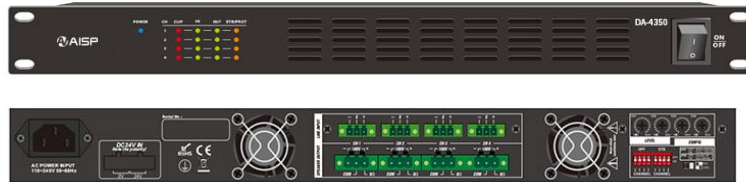

Features:

- Class-D digital amp with switching power tech
- Low power consumption & low heat
- 4-channel, 1U 19" rack mount
- 4x120W/4x240W/4x350W/4x500W rated output
- Supports 4Ω / 100V speaker outputs
- 4 balanced Phoenix inputs with independent gain control
- Per-channel high-cut filter
- Auto standby for power saving
- 4-channel status indicators (protect/clip/I/O)
- Full multi-protection (short/overload/over-temp/clip/DC)
- Switchable 115V/230V AC, optional 24V DC input

Connection Diagram:

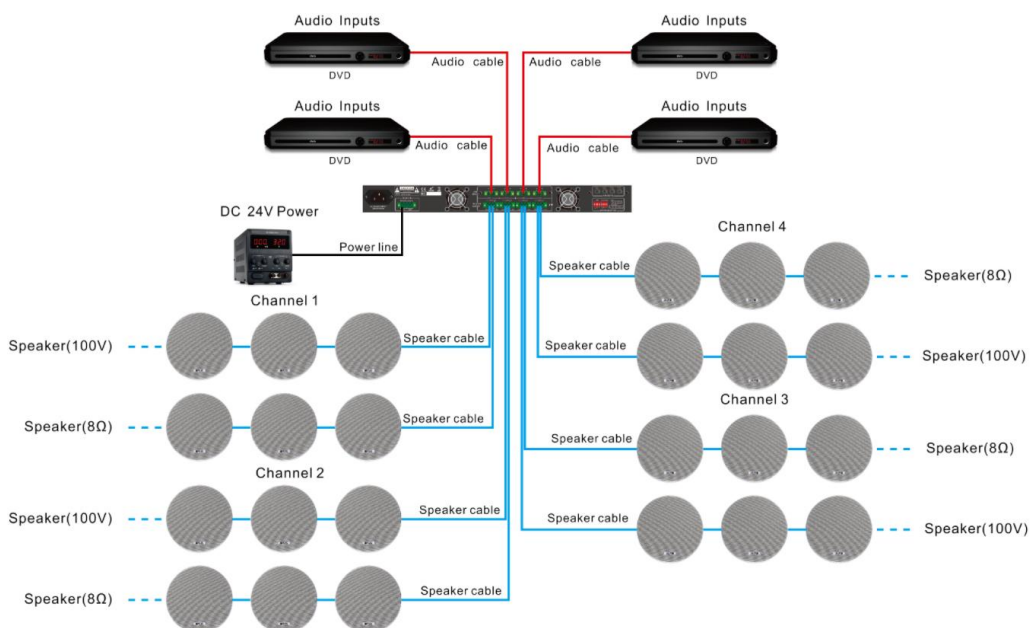

Specification:

Model	DA-4120	DA-4240	DA-4350	DA-4500
Description	Class-D Four Channel Power Amplifier			
Rated Power Output	4 × 120W	4 × 240W	4 × 350W	4 × 500W
Speaker Output	4Ω & 100V			
Frequency Response	L/H Cut OFF: 20Hz–20kHz (±2dB) L/H Cut ON: 70Hz–10kHz (±3dB)			
Input	0.775V, 0dBu, balanced phoenix connector for 4 channels			
Input Impedance	10 kΩ			
THD	<0.1% (1kHz/-3dBv, 100W)			
S/N Ratio	>80dB			
Crosstalk	>60dB @ 1kHz, Max output			
Power Consumption	600W	1200W	1750W	2300W
Power Supply	AC input switchable between 115V & 230V, 50–60Hz			
Dimensions (W×D×H)	482 × 420 × 44 mm			
Weight	8.5 kg	9.0 kg	9.5 kg	15.0 kg

Ideal for: Schools, universities, Offices, corporate buildings, Hotels, restaurants & shopping malls, Conference rooms, auditoriums & event venues.