

DA-1120/DA-1240/DA-1350/DA-1500


1 Channel 120W/240W/350W/500W Digital Power Amplifier



Features:

- Switching power Class-D PA amplifier
- Low power consumption & low heat
- Compact 1U 19" rack design
- 120W/240W/350W/500 rated output
- Supports 4–16Ω / 100V speakers
- Balanced Phoenix/XLR input
- Independent gain control per input
- Built-in high-cut filter
- Auto standby for power saving
- Protection, clip, I/O indicators
- Full protection: short circuit, overload, over temp, DC, clip
- Wide voltage: 115V/230V AC
- Optional 24V DC input

Connection Diagram:

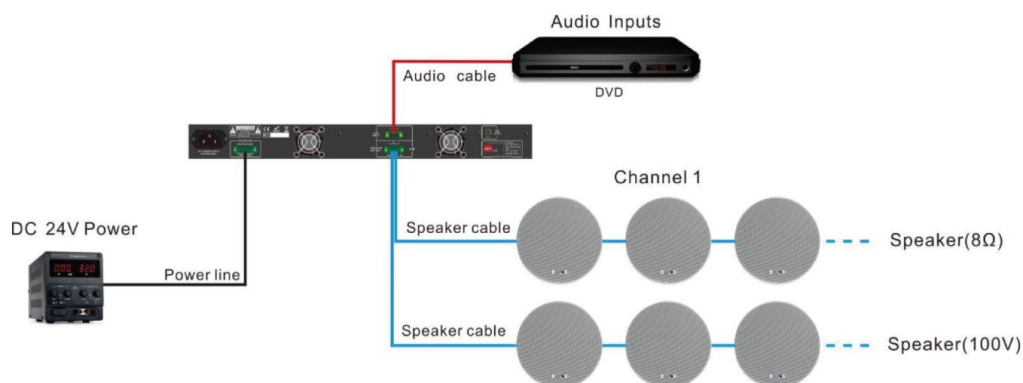

Specification:

Model	DA-1120	DA-1240	DA-1350	DA-1500
Description	Class-D Single Channel Power Amplifier			
Rated Power Output	120W	240W	350W	500W
Speaker Output	4-16Ω & 100V			
Frequency Response	L/H Cut OFF: 20Hz-20KHz (±2dB) L/H Cut ON: 70Hz-10KHz (±3dB)			
Input	0.775V, 0dBu, balanced phoenix connector			
Input Impedance	10KΩ			
THD	<0.1% (1kHz/-3dBv, 100W)			
S/N Ratio	>80dB (
Crosstalk	>60dB, 1kHz, Max output			
Power Consumption	200W	300W	420W	550W
Power Supply	AC input switchable between 115V & 230V, 50-60Hz; 24V DC input as option			
Dimension	482(W)×420(D)×44(H) mm			
Weight	4.2kg	4.5kg	5kg	5.5kg

Ideal for: Schools, universities, Offices, corporate buildings, Hotels, restaurants & shopping malls, Conference rooms, auditoriums & event venues.